

January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

### QUICK REFERENCE DATA

- $V_R = 3750V$
- $I_F = 625mA$
- $t_{rr} = 350ns$
- $I_R = 0.25\mu A$


### AXIAL LEADED HERMETICALLY SEALED HIGH VOLTAGE FAST RECTIFIER DIODE

- Very low reverse recovery time
- High thermal shock resistance
- Glass passivated for hermetic sealing
- Low switching losses
- Soft, non-snap off, recovery characteristics

### ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	8PF37	Unit
Working reverse voltage	$V_{RWM}$	3750	V
Repetitive reverse voltage	$V_{RRM}$	4200	V
Surge reverse voltage	$V_{RSM}$	4500	V
Average forward current (@ 55°C in oil)	$I_{F(AV)}$	625	mA
Repetitive surge current (@ 55°C in oil, lead length 0.375")	$I_{FRM}$	9.0	A
Non-repetitive surge current ( $t_p = 8.3ms$ , @ $V_R$ & $T_{jmax}$ )	$I_{FSM}$	22.0	A
Storage temperature range	$T_{STG}$	-65 to +165	°C
Operating temperature range	$T_{OP}$	-65 to +165	°C

### MECHANICAL

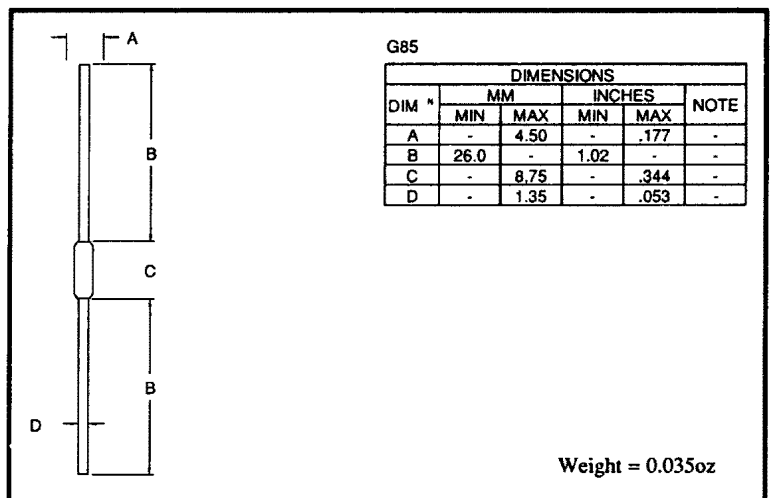

January 7, 1998

**CHARACTERISTICS** (@ 25°C unless otherwise specified)

	Symbol	8PF37	Unit
Average forward current (pcb mounted; $T_A = 55^\circ\text{C}$ ) for sine wave	$I_{F(AV)}$	250	mA
	$I_{F(AV)}$	260	mA
Average forward current max. (unstirred oil at $55^\circ\text{C}$ ) for sine wave	$I_{F(AV)}$	590	mA
	$I_{F(AV)}$	625.	mA
$I^2t$ for fusing ( $t = 8.3\text{mS}$ ) max.	$I^2t$	2.0	$\text{A}^2\text{S}$
Forward voltage drop max. @ $I_F = 800\text{mA}$ , $T_j = 25^\circ\text{C}$	$V_F$	7.0	V
Reverse current max. @ $V_{RWM}$ , $T_j = 25^\circ\text{C}$ @ $V_{RWM}$ , $T_j = 100^\circ\text{C}$	$I_R$	0.25	$\mu\text{A}$
	$I_R$	50	$\mu\text{A}$
Reverse recovery time max. 50mA $I_F$ , 100mA $I_R$ , 25mA $I_{RR}$ .	$t_{rr}$	350	nS
Junction capacitance typ. @ $V_R = 5\text{V}$ , $f = 1\text{MHz}$	$C_j$	6.3	$\mu\text{F}$
Thermal resistance - junction to oil Stirred oil	$R_{\theta JO}$	19	$^\circ\text{C}/\text{W}$
	$R_{\theta JO}$	25	$^\circ\text{C}/\text{W}$
Thermal resistance - junction to amb. on 0.06" thick pcb. 1oz copper.	$R_{\theta JA}$	81	$^\circ\text{C}/\text{W}$

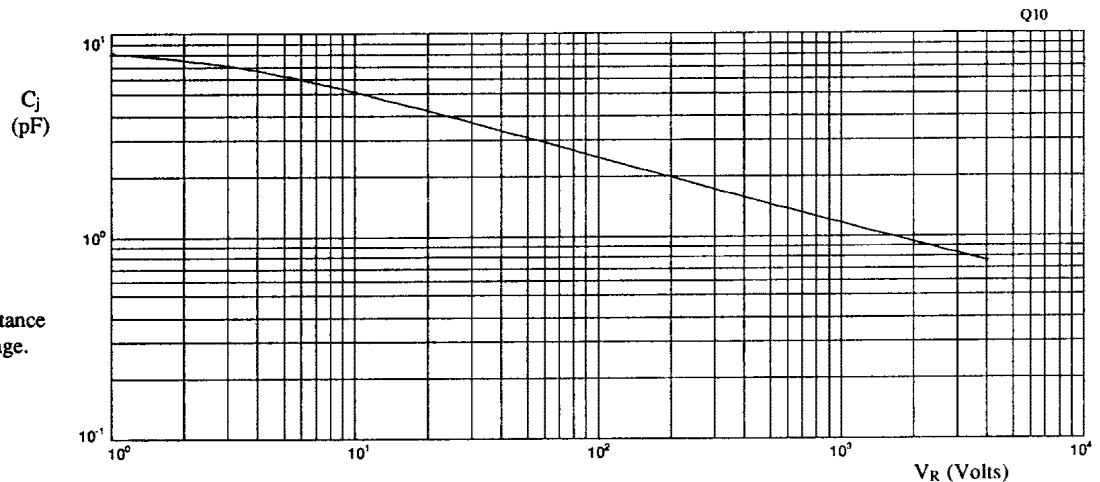


Fig 1. Junction capacitance against reverse voltage.

January 7, 1998

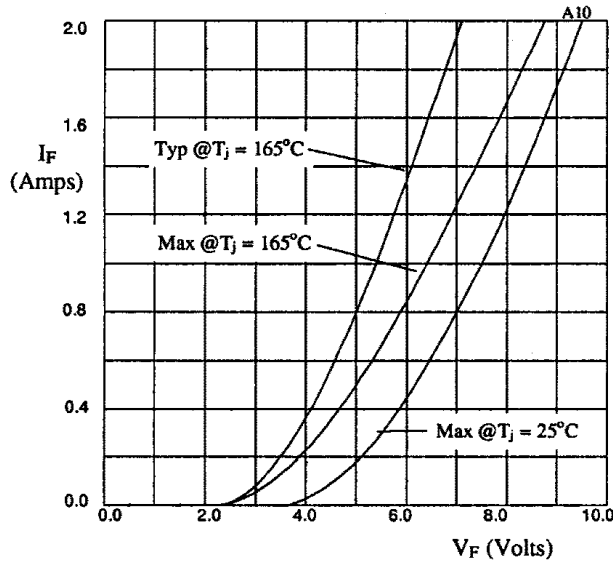


Fig 2. Forward voltage drop as a function of forward current.

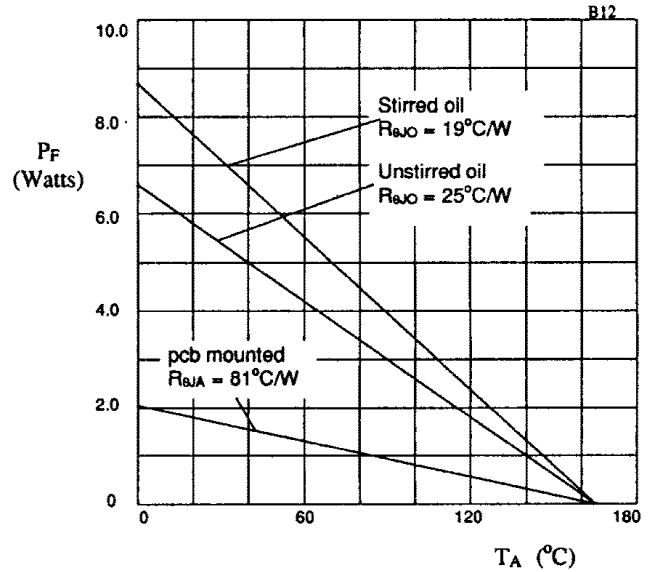


Fig 3. Power derating in air and oil.

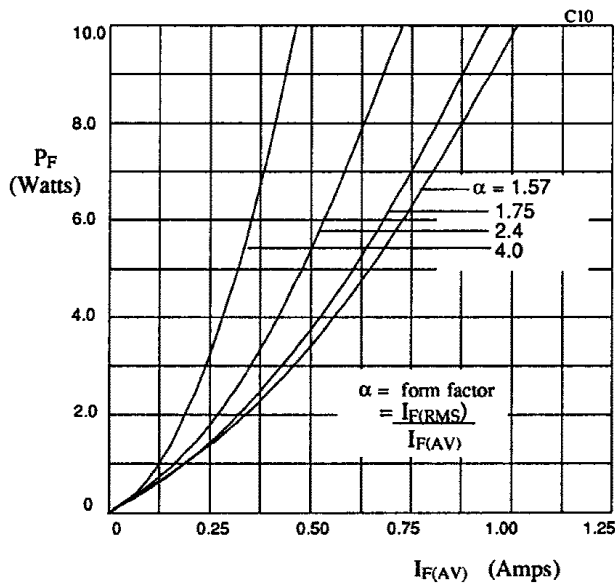


Fig 4. Forward power dissipation as a function of forward current, for sinusoidal operation.

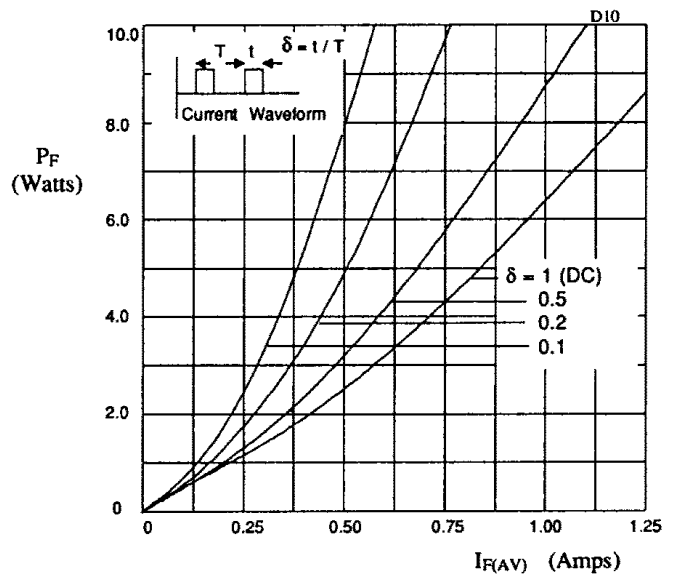


Fig 5. Forward power dissipation as a function of forward current, for square wave operation.