

N-CHANNEL MOSFET

Qualified per MIL-PRF-19500/557

DEVICES

2N6800 2N6800U

LEVELS

**JAN
JANTX
JANTXV**

ABSOLUTE MAXIMUM RATINGS ($T_C = +25^\circ\text{C}$ unless otherwise noted)


Parameters / Test Conditions	Symbol	Value	Unit
Drain – Source Voltage	V_{DS}	400	Vdc
Gate – Source Voltage	V_{GS}	± 20	Vdc
Continuous Drain Current $T_C = +25^\circ\text{C}$	I_{D1}	3.0	Adc
Continuous Drain Current $T_C = +100^\circ\text{C}$	I_{D2}	2.0	Adc
Max. Power Dissipation	P_{tl}	25 ⁽¹⁾	W
Drain to Source On State Resistance	$R_{ds(on)}$	1.0 ⁽²⁾	Ω
Operating & Storage Temperature	T_{op}, T_{stg}	-55 to +150	$^\circ\text{C}$

Note: (1) Derated Linearly by 0.2 W/ $^\circ\text{C}$ for $T_C > +25^\circ\text{C}$


(2) $V_{GS} = 10\text{Vdc}$, $I_D = 2.0\text{A}$

ELECTRICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, unless otherwise noted)

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS				
Drain-Source Breakdown Voltage $V_{GS} = 0\text{V}$, $I_D = 1\text{mA}$	$V_{(BR)DSS}$	400		Vdc
Gate-Source Voltage (Threshold) $V_{DS} \geq V_{GS}$, $I_D = 0.25\text{mA}$ $V_{DS} \geq V_{GS}$, $I_D = 0.25\text{mA}$, $T_j = +125^\circ\text{C}$ $V_{DS} \geq V_{GS}$, $I_D = 0.25\text{mA}$, $T_j = -55^\circ\text{C}$	$V_{GS(th)1}$ $V_{GS(th)2}$ $V_{GS(th)3}$	2.0 1.0	4.0 5.0	Vdc
Gate Current $V_{GS} = \pm 20\text{V}$, $V_{DS} = 0\text{V}$ $V_{GS} = \pm 20\text{V}$, $V_{DS} = 0\text{V}$, $T_j = +125^\circ\text{C}$	I_{GSS1} I_{GSS2}		± 100 ± 200	nAdc
Drain Current $V_{GS} = 0\text{V}$, $V_{DS} = 320\text{V}$ $V_{GS} = 0\text{V}$, $V_{DS} = 320\text{V}$, $T_j = +125^\circ\text{C}$	I_{DSS1} I_{DSS2}		25 0.25	μAdc mAdc
Static Drain-Source On-State Resistance $V_{GS} = 10\text{V}$, $I_D = 2.0\text{A}$ pulsed $V_{GS} = 10\text{V}$, $I_D = 3.0\text{A}$ pulsed $T_j = +125^\circ\text{C}$ $V_{GS} = 10\text{V}$, $I_D = 2.0\text{A}$ pulsed	$r_{DS(on)1}$ $r_{DS(on)2}$ $r_{DS(on)3}$		1.0 1.10 2.40	Ω Ω Ω
Diode Forward Voltage $V_{GS} = 0\text{V}$, $I_D = 3.0\text{A}$ pulsed	V_{SD}		1.4	Vdc



**TO-205AF
(formerly TO-39)**



U – 18 LCC



6 Lake Street, Lawrence, MA 01841
1-800-446-1158 / (978) 620-2600 / Fax: (978) 689-0803
Website: <http://www.microsemi.com>

TECHNICAL DATA SHEET

N-CHANNEL MOSFET

Qualified per MIL-PRF-19500/557

DYNAMIC CHARACTERISTICS

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Gate Charge: On-State Gate Charge Gate to Source Charge Gate to Drain Charge	$Q_{g(on)}$ Q_{gs} Q_{gd}		34.75 5.75 16.59	nC
$V_{GS} = 10V, I_D = 3.0A$ $V_{DS} = 200V$				


SWITCHING CHARACTERISTICS

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Switching time tests: Turn-on delay time Rinse time Turn-off delay time Fall time	$t_{d(on)}$ t_r $t_{d(off)}$ t_f		30 35 55 35	ns
$I_D = 3.0A, V_{GS} = 10Vdc,$ Gate drive impedance = $7.5\Omega,$ $V_{DD} = 176Vdc$				
Diode Reverse Recovery Time	t_{rr}		700	ns
$di/dt \leq 100A/\mu s, V_{DD} \leq 50V,$ $I_F = 3.0A$				

N-CHANNEL MOSFET

Qualified per MIL-PRF-19500/557

PACKAGE DIMENSIONS

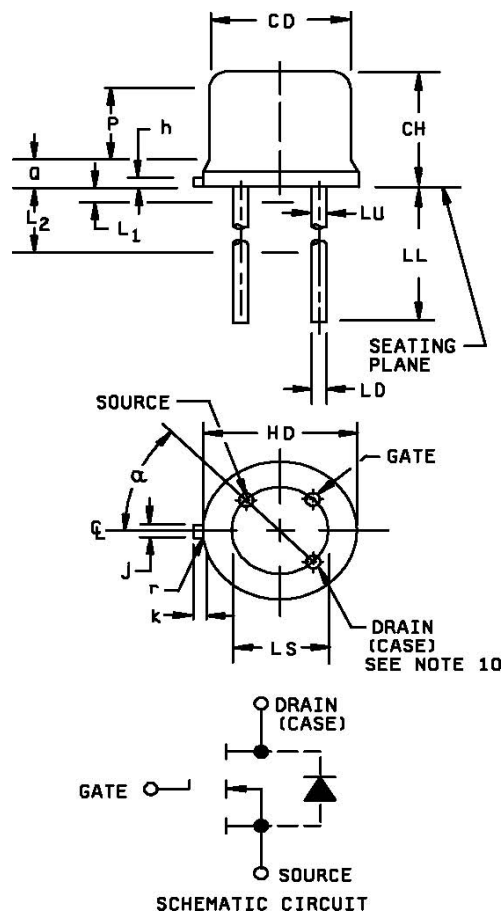

Ltr	Dimensions				
	Inches		Millimeters		Notes
	Min	Max	Min	Max	
CD	.305	.355	7.75	9.02	
CH	.160	.180	4.07	4.57	
HD	.335	.370	8.51	9.39	
h	.009	.041	0.23	1.04	
J	.028	.034	0.72	0.86	2
k	.029	.045	0.74	1.14	3
LD	.016	.021	0.41	0.53	7, 8
LL	.500	.750	12.7	19.05	7, 8
LS	.200 TP		5.08 TP		6
LU	.016	.019	0.41	0.48	7, 8
L1		.050		1.27	7, 8
L2	.250		6.35		7, 8
P	.070		1.78		5
Q		.050		1.27	4
r		.010		0.25	9
α	45° TP		45° TP		6

NOTES:

- 1 Dimensions are in inches. Millimeters are given for general information only.
- 2 Beyond radius (r) maximum, j shall be held for a minimum length of .011 (0.028 mm).
- 3 Dimension k measured from maximum HD.
- 4 Outline in this zone is not controlled.
- 5 Dimension CD shall not vary more than .010 (0.25 mm) in zone P. This zone is controlled for automatic handling.
- 6 Leads at gauge plane .054 +.001, -.000 (1.37 +0.03, -0.00 mm) below seating plane shall be within .007 (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC.
- 6 LU applies between L1 and L2. LD applies between L2 and L minimum. Diameter is uncontrolled in L1 and beyond LL minimum.
- 7 All three leads.
- 8 Radius (r) applies to both inside corners of tab.
- 9 Drain is electrically connected to the case.
- 10 In accordance with ASME Y14.5M, diameters are equivalent to øx symbology.

* **FIGURE 1. Physical dimensions for TO-205AF.**



Microsemi

6 Lake Street, Lawrence, MA 01841


1-800-446-1158 / (978) 620-2600 / Fax: (978) 689-0803

Website: <http://www.microsemi.com>

TECHNICAL DATA SHEET

N-CHANNEL MOSFET

Qualified per MIL-PRF-19500/557

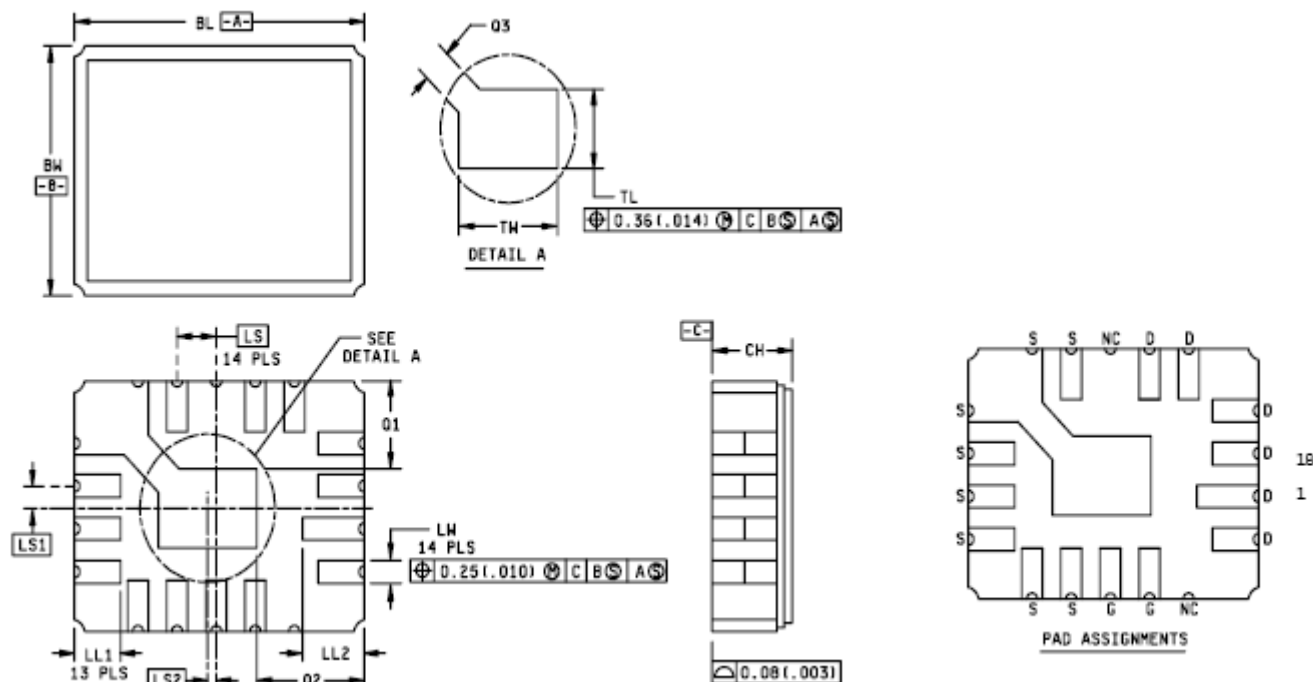

NOTES:

- 1 Dimensions are in inches.
2 Millimeters are given for general information only.
3 In accordance with ASME Y14.5M, diameters are equivalent to
4 $\varnothing$ symbolology.
5 Ceramic package only.

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BL	.345	.360	8.77	
BW	.280	.295	7.11	
CH	.095	.115	2.41	
LL1	.040	.055	1.02	
LL2	.055	.065	1.40	
LS	.050 BSC		1.27 BSC	
LS1	.025 BSC		0.635 BSC	
LS2	.008 BSC		0.203 BSC	
LW	.020	.030	0.51	0.76
Q1	.105 REF		2.67 REF	
Q2	.120 REF		3.05 REF	
Q3	.045	.055	1.14	1.40
TL	.070	.080	1.78	2.03
TW	.120	.130	3.05	3.30