

RSC200FF120C8NS-S04

SiC MOSFET Module


Preliminary Data

Features:

- Automotive qualified base on AEC_Q101
- Ultra low loss
- High-frequency operation
- Zero turn-off tail current from MOSFET
- Normally-off, fail-safe device operation
- Easy of paralleling
- Low stray inductance
- >4kV DC 1 sec insulation
- Direct cooled pinfin base plate
- Toughened DBC substrates for superior reliability
- Integrated NTC temperature sensor
- Press fit signal terminals
- UL 94 V0 module frame
- Lead Free, Compliant with RoHS Requirement



Notes: Signal terminal position to be defined.

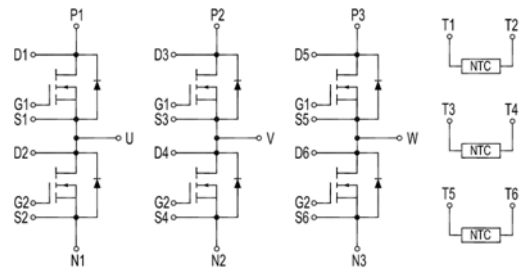

Applications:

- Solar Inverter
- High Voltage DC/DC Converters
- Motor Drives
- EV Chargers
- UPS

Maximum Rated Values ($T_F=25^\circ\text{C}$ unless otherwise specified)

Symbol	Description	Conditions	Value	Unit
V_{DSmax}	Drain-Source Voltage		1200	V
V_{GSmax}	Gate-Source Voltage	Absolute Maximum Values	-8/+19	V
V_{GSop}	Gate-Source Voltage	Recommended Operational Values	-4/+15	V
I_D	Continuous Drain Current	$V_{GS}=15\text{V}, T_F=25^\circ\text{C}$	252	A
		$V_{GS}=15\text{V}, T_F=100^\circ\text{C}$	200	A
$I_{D(pulse)}$	Pulsed Drain Current	Pulse width t_p limited by T_{Jmax}	480	A
P_D	Power Dissipation	$T_F = 25^\circ\text{C}, T_{Jmax}=175^\circ\text{C}$	445	W

Electrical Characteristics of MOSFET ($T_F=25^\circ\text{C}$ unless otherwise specified)

Static Characteristics

Symbol	Description	Conditions	Min	Typ	Max	Unit
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}, I_D=76\mu\text{A}$	1.20			kV
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = 10\text{V}, I_D = 46\text{mA}$	1.8	2.5	3.6	V
		$V_{DS} = 10\text{V}, I_D = 46\text{mA}, T_J = 175^\circ\text{C}$		2.1		V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 1.2\text{kV}, V_{GS} = 0\text{V}$		5	1000	μA
I_{GSS}	Gate- Source Leakage Current	$V_{DS} = 0\text{V}, V_{GS} = 15\text{V}$		50	1000	nA
$R_{DS(on)}$	On State Resistance	$V_{GS} = 15\text{V}, I_D = 160\text{A}$	5.6	8	10.4	m Ω
		$V_{GS} = 15\text{V}, I_D = 160\text{A}, T_J = 175^\circ\text{C}$		14.4		m Ω
g_{fs}	Transconductance	$V_{DS} = 20\text{V}, I_D = 160\text{A}$		108		S
		$V_{DS} = 20\text{V}, I_D = 160\text{A}, T_J = 175^\circ\text{C}$		88		S
C_{iss}	Input Capacitance	$V_{DS} = 1000\text{V}, V_{GS} = 0\text{V}, f = 100\text{kHz}, V_{AC} = 25\text{mV}$		13.43		nF
C_{oss}	Output Capacitance			0.52		nF
C_{rss}	Reverse Transfer Capacitance			0.32		pF
$R_{G(int)}$	Internal Gate Resistance	$f=1\text{MHz}, V_{AC}=25\text{ mV}$		0.43		Ω

Q _G	Total Gate Charge	V _{DD} =800V, I _D =160A, V _{GS} = -4/15V		472		nC
Q _{GS}	Gate-Source Charge			160		nC
Q _{GD}	Gate-Drain (Miller) Charge			136		nC
R _{θJF}	Thermal Resistance, junction to cooling fluid	cooling fluid = 50% water; DV/Dt = 10,0 dm ³ /min		0.337		K/W

Reverse Diode Characteristics (T_F=25°C unless otherwise specified)

Symbol	Description	Conditions	Min	Typ	Max	Unit
V _{SD}	Diode Forward Voltage	I _{SD} =80A, V _{GS} =-4V, T _J =25°C		4.6		V
		I _{SD} =80A, V _{GS} =-4V, T _J =175°C		4.0		V
t _{rr}	Reverse Recover Time	I _{SD} =160A, V _{GS} =-4V, V _R =800V, dif/dt=2250A/μs, T _J =175°C		108		ns
Q _{rr}	Reverse Recovery Charge			1.91		μC
I _{rrm}	Peak Reverse Recovery Current				108	

Internal NTC-Thermistor Characteristic

R ₂₅	T _F =25°C	5		kΩ
ΔR/R	T _F =100°C, R ₁₀₀ =481Ω		±5	%
P ₂₅	T _F =25°C	50		mW
B _{25/50}	R ₂ =R ₂₅ exp[B _{25/50} (1/T ₂ -1/(298.15K))]	3380		K
B _{25/80}	R ₂ =R ₂₅ exp[B _{25/80} (1/T ₂ -1/(298.15K))]	3440		K

Module

Symbol	Description	Min	Typ	Max	Unit
V_{iso}	Isolation Voltage (All Terminals Shorted)	RMS, f=0Hz, t=1sec	4.2		kV
I_{RMS}	Maximum RMS Module Terminal Current	$T_F=75^{\circ}C, T_{ct}=105^{\circ}C$		500	A
Material of Module Base Plate		Copper			
Internal Isolation		Improved Al2O3 Ceramic			
d_{creep}	Terminal to heatsink		9.0		mm
	Terminal to Terminal		9.0		
d_{clear}	Terminal to heatsink		4.5		mm
	Terminal to Terminal		4.5		
CTI	Comparative Tracking Index	200			
T_J	Maximum Junction Temperature			175	$^{\circ}C$
T_{JOP}	Maximum Operating Junction Temperature Range	-40		+150	$^{\circ}C$
T_{stg}	Storage Temperature	-40		+125	$^{\circ}C$
L_{sCE}	Stray Inductance Module		7.6		nH
M	Power Terminals Screw: M5	2.5		5.0	N·m
M	Baseplate to Heatsink:M4	1.8		2.2	N·m
M	Screw PCB to frame	0.45	0.50	0.55	N·m
G	Weight		550		g



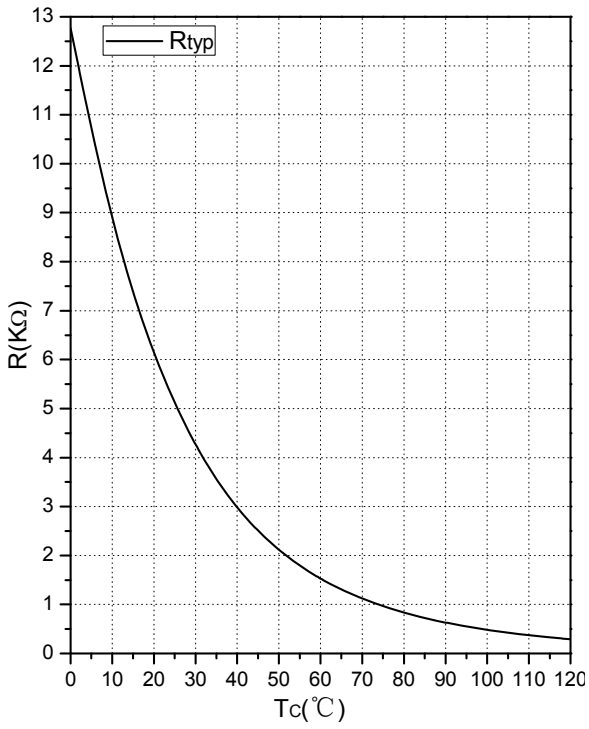


Fig.1 NTC Temperature Characteristics

Internal Circuit:

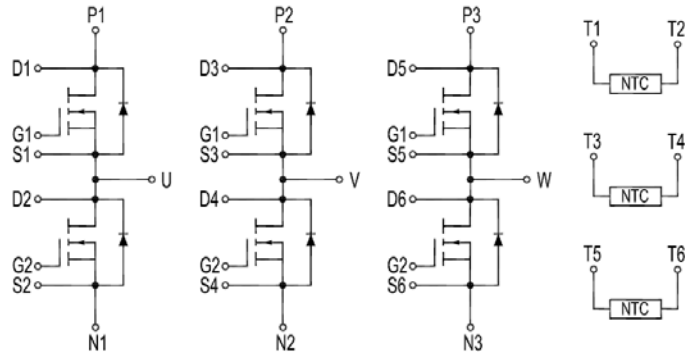

Package Outline (Unit: mm):

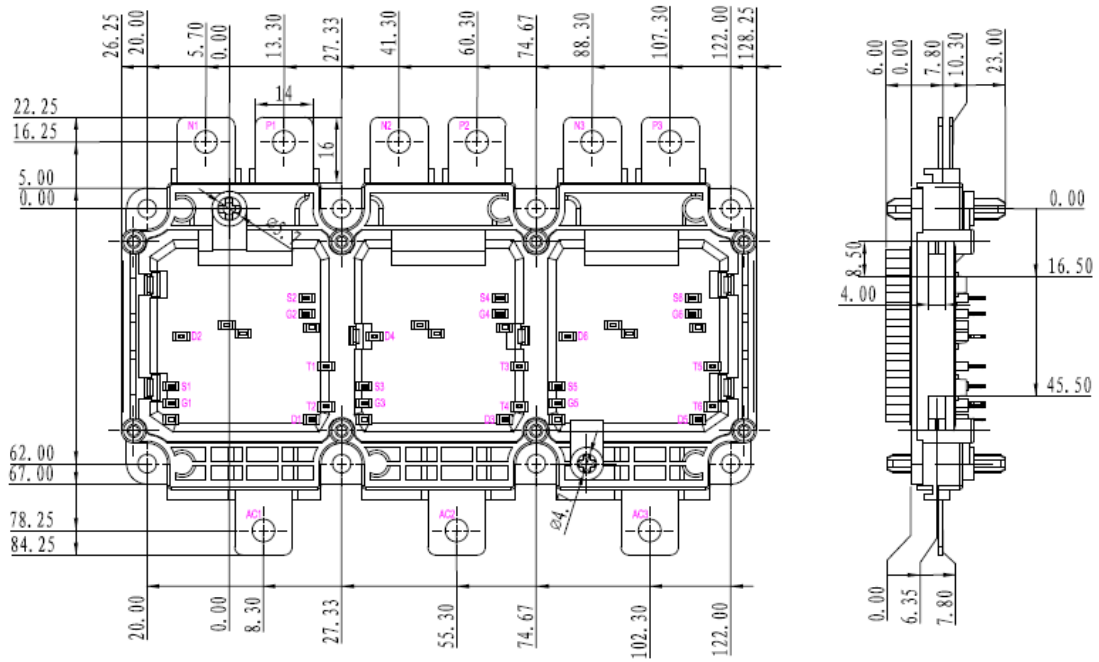

Notes: Signal terminal position to be defined.